

# Waste Oil Cabinet

## Installation Instructions



**Important - R9 & R24 - Wall mount only**

### Mounting


1. Remove base tray.
2. Remove the 4 rubber blanking bungs from the back of the cabinet.
3. Place the cabinet in position against the wall with the lock on the right hand side, as shown in diagram.
4. Level the cabinet using off-cuts of wood etc.
5. With the door open, drill through the 4 mounting holes into the wall at least 60mm deep using 10mm masonry drill bit.
6. Push the 4 sleeve anchor bolts through the back of the cabinet and into the wall, hand tighten the nuts then tap home with a hammer and fully tighten with a spanner/socket.
7. Remove the packing used to level the cabinet and check that the door operates smoothly. If not, loosen a nut on the sleeve anchor and tighten the bolt next to it to true up the cabinet and then re-tighten the sleeve anchor. Repeat as necessary until the door operates properly.
8. Sweep out any drill dust and replace the base tray, locating the rear first.

### Hint

If you can't site directly to a wall or the fixing is weak, drill into the upper part of the cabinet sides and bolt on one or more brackets (*wood or metal*). To brace the cabinet unit use plain headed coachbolts, this will help prevent removal.

### Cabinet Diagram

(Example shows an R24 cabinet)  
Note: Door always opens right to left

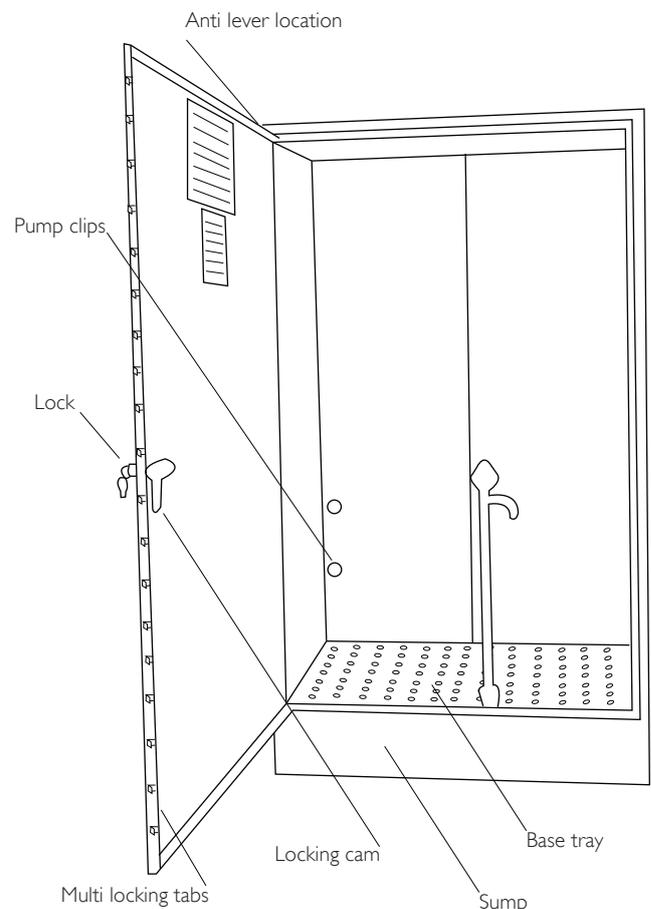

### Warning

**MAKE SURE YOU DO NOT DRILL WHERE THERE MIGHT BE ELECTRIC, GAS OR WATER PIPES.**

**Ri MANUFACTURING ACCEPT NO RESPONSIBILITY FOR ANY DAMAGE CAUSED TO PERSONS OR PROPERTY DURING INSTALLATION OF THE CABINET.**